


ASFALT
 SZNUR SMOŁOWANY - UBITY
 STAL RURA $\phi 162 \times 12$ DŁ. 80
 OCHRONNA



9100


7600

3800

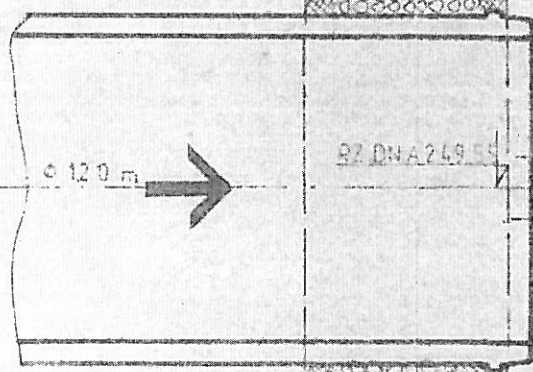

ASFALT
 SZNUR SMOŁOWANY - UBITY
 STALOWA RURA $\phi 162 \times 12$ DŁ. 80
 OCHRONNA

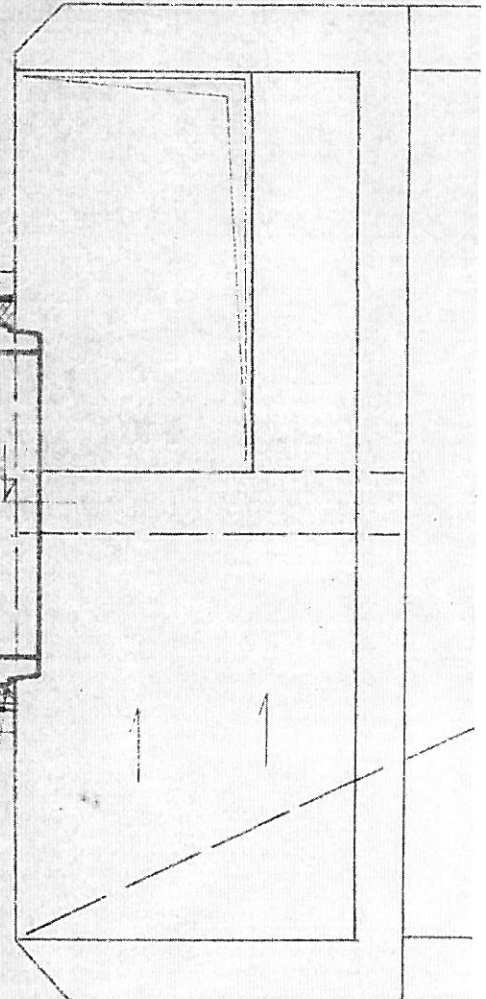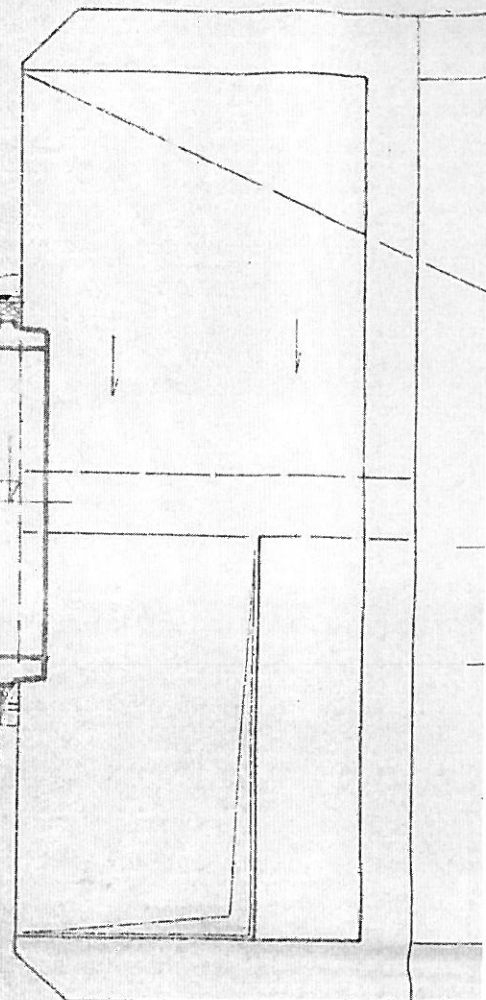

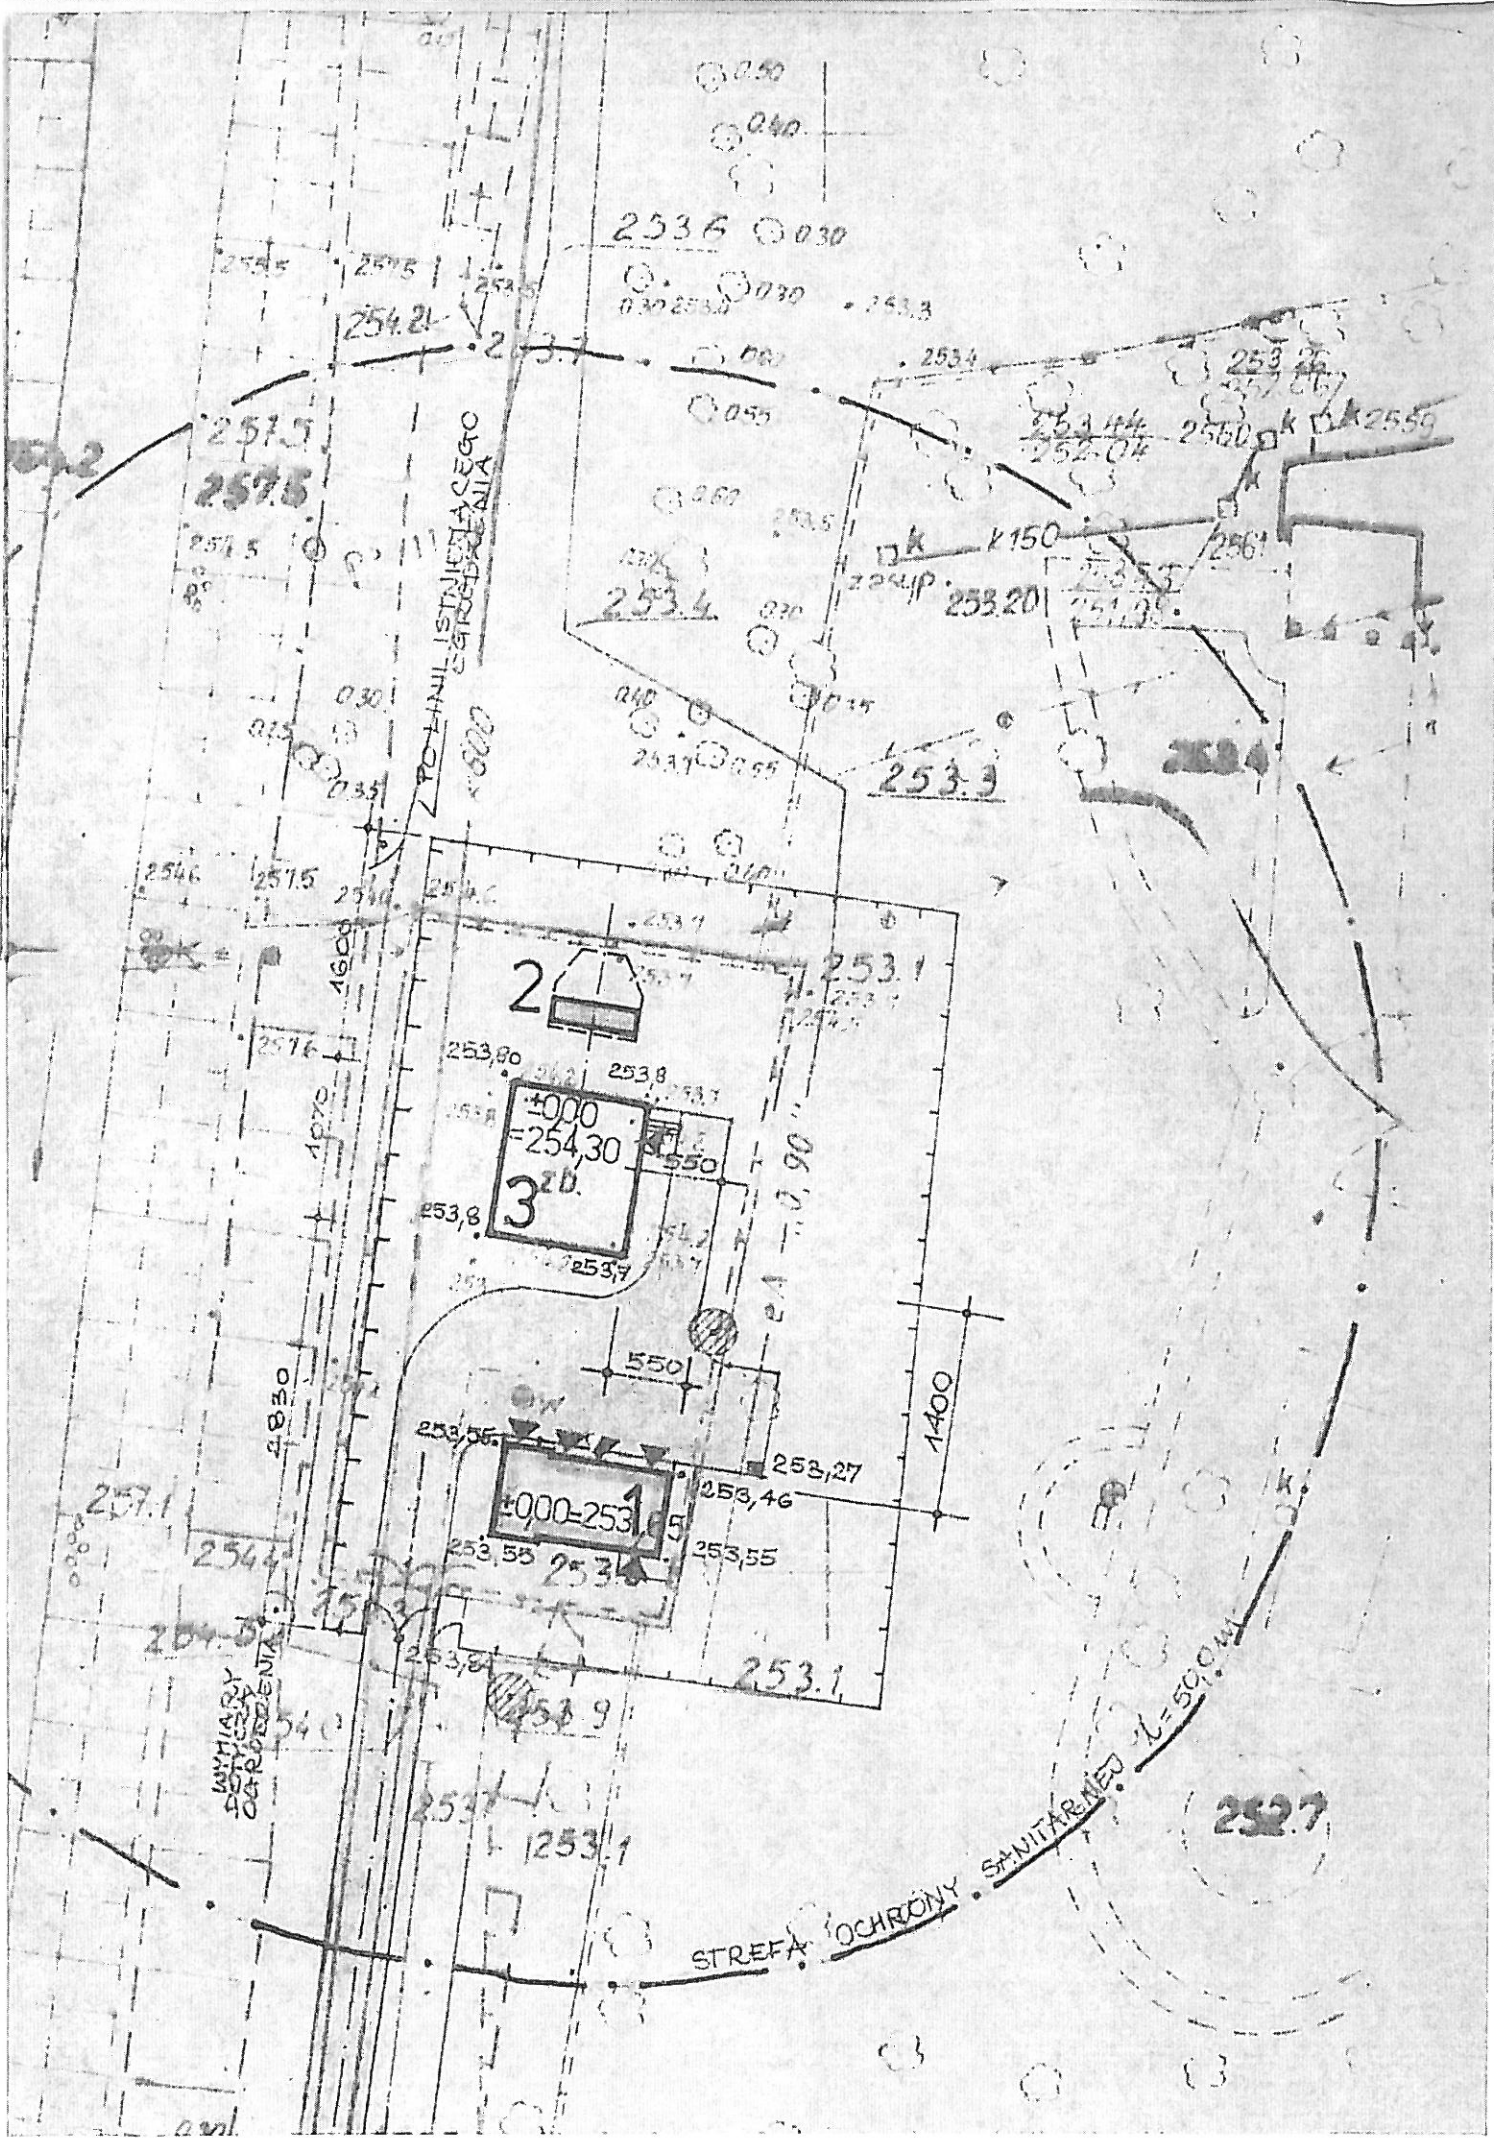

2536 030

2575
2575

254.21

030 253.0

2534

253 25

257 26

253.44

252.04

2559

257.5

253.4

253.20

2561

030
015
035

253.7

253.3



2546

2575

2546

253.7

253.1



2576

253.80

253.8

253.7

1600

1470

253.8

253.7

550


1400

257.1

2544

253.56

253.27



253.46

253.55

253.1

253.55

204.5

253.84

253.1

WYMIARY
POSRECI
OGRZEWANIA

253.9

253.1

253.1

STREFA OCHRONY SANITARNEJ R=50.0m

2527

SEKFA
STEROWNICZA

WIAZKA KABLI ZASILAJACYCH
POMPOWNIE

251.02

250.15

249.55

249.85

247.75

ALARMOWY POZ. SIECIOWY
MAX

MIN

